

TOM O'BRIEN CHRYSLER JEEP DODGE RAM NO
4630 E 96TH STREET
INDIANAPOLIS, IN 462403742

Configuration Preview

Date Printed: 2022-07-11 2:31 PM VIN: Quantity: 1
Estimated Ship Date: VON: Status: BA - Pending order

Sold to: TOM O'BRIEN CHRYSLER JEEP DODGE RAM NORTH (61884)
4630 E 96TH STREET
INDIANAPOLIS, IN 462403742

Ship to: TOM O'BRIEN CHRYSLER JEEP DODGE RAM NORTH (61884)
4630 E 96TH STREET
INDIANAPOLIS, IN 462403742

Vehicle: 2022 5500 REG CAB CHASSIS 4X4 (168.5 in WB - CA of 84 in) (DP0L64)

	Sales Code	Description	MSRP(USD)
Model:	DP0L64	5500 REG CAB CHASSIS 4X4 (168.5 in WB - CA of 84 in)	51,805
Package:	27A	Customer Preferred Package 27A	0
	ESB	6.4L V8 Heavy Duty HEMI Engine	0
	DF3	6-Spd Auto Aisin AS66RC HD Trans	0
Paint/Seat/Trim:	PW7	Bright White Clear Coat	0
	APA	Monotone Paint	0
	*TX	HD Vinyl 40/20/40 Split Bench Seat	0
	-X8	Black/Diesel Gray	0
Options:	MRT	Chrome Tubular Side Steps	495
	XAC	ParkView Rear Back-up Camera	495
	XAW	Rear Backup Alarm	145
	XHC	Trailer Brake Control	465
	WP2	19.5x6.0 Aluminum Whls (Set of 6)	1,995
	DK3	Elec Shift-On-The-Fly Transfer Case	295
	AH5	• Payload Upgrade Package	595
	LAY	LED Tail Lamps	95
	AHD	• Heavy Duty Snow Plow Prep Group	495
	CLY	Mopar Front Rubber Floor Mats	100
	A61	• Tradesman Level 1 Equipment Group	1,490
	JKV	115V Auxiliary Power Outlet	195
	5N7	Saved Favorites	0
	142	Zone 42-Detroit	0
	4EA	Sold Vehicle	0
Destination Fees:			1,795
			= Restriction

Total Price: 60,460
1,047. '23 INHOUSE
62,898 *

Order Type: Retail
Scheduling Priority: 1-Sold Order
Salesperson:
Customer Name:
Customer Address:

PSP Month/Week:
Build Priority: 99

Instructions: * '23 INCENTIVES HAVE NOT BEEN RELEASED

Note: This is not an invoice. The prices and equipment shown on this priced order confirmation are tentative and subject to change or correction without prior notice. No claims against the content listed or prices quoted will be accepted. Refer to the vehicle invoice for final vehicle content and pricing. Orders are accepted only when the vehicle is shipped by the factory.


Payload Upgrade Package (AH5)



Details:

- 4.89 Rear Axle Ratio (DPL)
- GVW Rating - 19500# (Z0C)


Heavy Duty Snow Plow Prep Group (AHD)

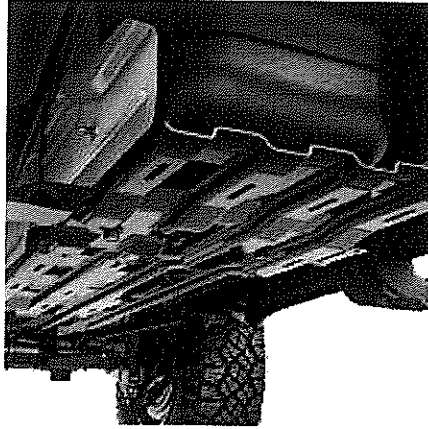

Details:

- Transfer Case Skid Plate Shield (XEF)
- Heavy Duty Front Suspension Group (AZB)
- 220 Amp Alternator (BAJ)

Tradesman Level 1 Equipment Group (A61)

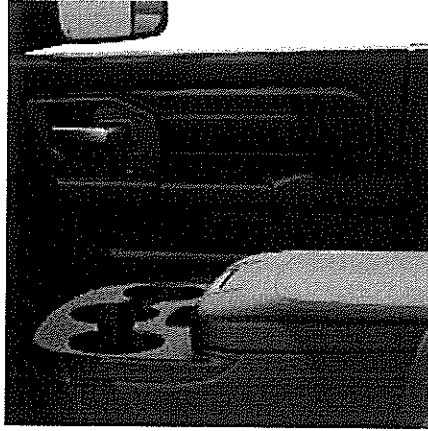

Details:

- ⦿ Speed Sensitive Power Locks (JPH)
 - Ext. Mirrors w/Supplemental Signals (LEB)
 - Upgraded Door Trim Panel (CTY)
 - Exterior Mirrors Courtesy Lamps (LEC)
- ⦿ Trailer Tow Mirrors (LEG)
 - Exterior Mirrors w/Heating Element (NHJ)
- ⦿ Pwr Windows, Front 1-Touch Down (JPY)
 - Mirror Running Lights (LNY)
 - Black Exterior Mirrors (LE4)
 - Overhead Console (CUN)
- ⦿ Remote Keyless Entry (GXM)
 - Power Black Trailer Tow Mirrors (GPG)
 - Overhead Cupholder Lamp (LBT)

2022 Stellantis Product Info



2022 Ram Commercial 3500, 4500 & 5500 Chassis Cab SPECIFICATIONS

*Specifications are based on the latest product information available at the time of publication.
All dimensions are in inches (millimeters) unless otherwise noted.
All dimensions measured at curb weight with standard tires and wheels.*

GENERAL INFORMATION

Vehicle Type	Regular Cab, Crew Cab: 4x2, 4x4
Assembly Plant	Saltillo Truck Assembly Plant, Coahuila, Mexico

BODY/CHASSIS

Model	4x2	4x4
Layout	Longitudinal, front engine	Longitudinal, front engine, transfer case
Construction	Ladder-type frame, steel cab	Ladder-type frame, steel cab

* ENGINE: 6.4-LITER HEMI® V-8 (SIX-SPEED)

Type and Description	90-degree gasoline V-8 with variable cam timing
Displacement	392 cu. in. (6,417 cu. cm)
Bore x Stroke	4.09 x 3.72 (103.9 x 94.6)
Valve System	Pushrod-operated overhead valves, 16 valves, eight de-activating and eight hydraulic lifters, all with roller followers
Fuel Injection	Sequential, multiport, electronic, returnless
Construction	Deep-skirt cast-iron block with cross-bolted main bearing caps, 356 aluminum cylinder heads with hemispherical combustion chambers
Compression Ratio	10.0:1
Power	370 hp (306 Kw) @ 5,600 rpm
Torque	429 lb.-ft. (582 N•m) @ 4,000 rpm
Maximum Engine Speed	5,800 rpm limited
Fuel Requirement	Unleaded regular, 87 octane
Oil Capacity	7.0 quarts (6.6 liters)
Coolant Capacity	16.6 quarts (15.75 liters)
Emission Controls	Three-way catalytic converters, heated oxygen sensors, cooled electronic exhaust-gas recirculation (EGR) and individual cylinder fuel control

2022 Stellantis Product Info



* TRANSMISSION: AISIN AS66RC — AUTOMATIC SIX-SPEED

Availability	6.4-liter HEMI V-8
Description	Three planetary gear-sets, one overrunning clutch, full electronic control, electronically controlled converter clutch
Gear Ratios	
1st	3.23
2nd	1.84
3rd	1.41
4th	1.00
5th	0.82
6th	0.63
Reverse	4.44
Axle Ratios	4.44, 4.89
PTO Capability	Left or right

* TRANSFER CASE: BW 44-46, BW 44-47

Availability	Optional on 6.7-liter diesel and 6.4-liter HEMI V-8
Type	Part-time – BW 44-47 manual shift and BW 44-46 electric shift
Operating Modes	2WD; 4WD High; Neutral; 4WD Low
Low-Range Ratio	2.64
Center Differential	None

TRANSFER CASE: BW 44-48, 44-49

Availability	6.7-liter diesel high output
Type	44-48 part-time with electric shift, 44-49 part-time manual shift
Operating Modes	2WD; 4WD High; Neutral; 4WD Low
Low-Range Ratio	2.64
Center Differential	None

AXLES

Front (4x4)	AAM 10.5-in. beam front axle with center disconnect
Rear	AAM 12.0-in. beam rear axle

2022 Stellantis Product Info



ELECTRICAL SYSTEM

Alternator

Rating	160-amp included with 6.4-liter HEMI V-8 and 6.7-liter diesel 220-amp included with 6.7-liter Laramie and Limited Dual (220 and 160) optional on 6.4-liter HEMI V-8 Dual 220-amp optional on 6.7-liter diesel
--------	--

Battery

Description	Group 65, maintenance-free, 730 CCA on 6.4-liter HEMI V-8 Dual Group 65, maintenance-free, 730 CCA on 6.7-liter diesel
-------------	---

SUSPENSION 3500 (INCLUDES 10,000 GVWR MODEL)

Model	4x2	4x4
Front	Three-link with track bar, coil springs, stabilizer bar, solid axle	Three-link with track bar, coil springs, stabilizer bar, solid axle
Rear	Two-stage longitudinal leaf solid axle	Two-stage longitudinal leaf solid axle

* SUSPENSION 4500/5500

Model	4x2	4x4
Front	Five-link with track bar, coil springs, stabilizer bar, solid axle	Five-link with track bar, coil springs, stabilizer bar, solid axle
Rear	Two-stage longitudinal leaf solid axle	Two-stage longitudinal leaf solid axle

BRAKES 3500

Front

Size and Type	14.17 x 1.54 (359.9 x 39.1) disc with twin-piston pin-slider caliper and ABS
---------------	--

Rear

Size and Type	14.09 x 1.34 (357.9 x 34.0) disc with twin-piston pin-slider caliper and ABS
---------------	--

Power-Assist Type	Dual-rate, tandem diaphragm vacuum (gas) Hydro-boost
-------------------	---

2022 Stellantis Product Info



* BRAKES 4500/5500

Front

Size and Type 15.35 x 1.54 (390 x 39) disc with twin-piston pin-slider caliper and ABS

Rear

Size and Type 15.35 x 1.54 (390 x 39) disc with twin-piston pin-slider caliper and ABS

Power-Assist Type Hydro-boost

STEERING

Power Assist Hydraulic Assist

EXTERIOR DIMENSIONS

REGULAR CAB 60 CA SRW (3500)

Regular Cab 60 CA SRW (3500)	4x2	4x4
Wheelbase (nominal)	143.3 (3,639)	143.3 (3,639)
Track Width – Front	67.6 (1,716)	67.6 (1,716)
Track Width – Rear	67.0 (1,703)	67.0 (1,703)
Overall Length	235.3 (5,977)	235.3 (5,977)
Overall Width	82.6 (2,099)	82.6 (2,099)
Overall Height	80.9 (2,055)	80.9 (2,055)
Ground Clearance w/o Skid Plate	13.7 (347)	13.7 (347)
Ground Clearance w/ Skid Plate	N/A	13.7 (347)
Axle to Ground – Front	9.4 (240)	9.4 (240)
Axle to Ground – Rear	8.7 (221)	8.7 (221)
Rear of Frame to Ground	36.3 (922)	36.3 (922)
Approach Angle (degrees)	22.2	22.2
Departure Angle (degrees)	27.5	27.5
Ramp Breakover Angle w/o Skid Plate (degrees)	21.8	21.8
Ramp Breakover Angle w/ Skid Plate (degrees)	N/A	21.8

2022 Stellantis Product Info



CREW CAB 60 CA DRW (3500)

Crew Cab 60 CA DRW (3500)	4x2	4x4
Wheelbase (nominal)	172.4 (4,379)	172.4 (4,379)
Track Width – Front	69.6 (1,768)	69.6 (1,768)
Track Width – Rear	71.9 (1,825)	71.9 (1,825)
Overall Length	264.2 (6,710)	264.2 (6,710)
Overall Width	92.2 (2,341)	92.2 (2,341)
Overall Height	79.6 (2,022)	79.6 (2,022)
Axle to Ground – Front	8.5 (217)	8.5 (217)
Axle to Ground – Rear	8.0 (202)	8.0 (202)
Rear of Frame to Ground	34.3 (872)	34.3 (872)
Approach Angle (degrees)	21.0	21.0
Departure Angle (degrees)	25.1	25.1
Ramp Breakover Angle w/o Skid Plate (degrees)	18.0	18.0
Ramp Breakover Angle w/ Skid Plate (degrees)	N/A	18.0
Ground Clearance w/o Skid Plate	12.4 (316)	12.4 (316)
Ground Clearance w/ Skid Plate	N/A	12.4 (316)

* REGULAR CAB 4x2 AND 4x4 (4500/5500)

Regular Cab 4x2 And 4x4 (4500/5500)	60 CA	84 CA *
Wheelbase (nominal)	144.6 (3,674)	168.7 (4,284)
Track Width – Front	77.1 (1,958)	77.1 (1,958)
Track Width – Rear	73.6 (1,870)	73.6 (1,870)
Overall Length	236.3 (6,001)	260.2 (6,610)
Overall Width	93.2 (2,368)	93.2 (2,368)
Overall Height	81.7 (2,075)	81.5 (2,071)
Axle to Ground – Front	8.7 (221)	8.7 (221)
Axle to Ground – Rear	8.0 (202)	8.0 (202)
Rear of Frame to Ground	36.4 (925)	36.2 (920)
Approach Angle (degrees)	25.4	25.7

2022 Stellantis Product Info



Crew Cab 60 CA DRW (3500)	4x2	4x4
Interior Volume		
Front – cu. ft. (cu. m)	63.9 (1.8)	63.9 (1.8)
Rear – cu. ft. (cu. m)	60.7 (1.7)	60.7 (1.7)

* REGULAR CAB 4x2 AND 4x4 (4500/5500)

Regular Cab 4x2 And 4x4 (4500/5500)	60 CA	84 CA *
Seating Capacity, F/R	3/–	3/–
Front		
Headroom	39.8 (1,011)	38.9 (1,038)
Legroom	40.9 (1,040)	40.9 (1,040)
Shoulder Room	65.9 (1,675)	65.9 (1,675)
Hip Room	62.9 (1,598)	62.9 (1,598)
Seat Travel	9.1 (230)	9.1 (230)
Recliner Range (degrees)	59.0	59.0

Interior Volume

Front – cu. ft. (cu. m)	62.2 (1.8)	62.2 (1.8)
-------------------------	------------	------------

REGULAR CAB 4x2 AND 4x4 (4500/5500)

Regular Cab 4x2 And 4x4 (4500/5500)	108 CA	120 CA
Seating Capacity, F/R	3/–	3/–
Front		
Headroom	39.8 (1,011)	39.8 (1,011)
Legroom	40.9 (1,040)	40.9 (1,040)
Shoulder Room	65.9 (1,675)	65.9 (1,675)
Hip Room	62.9 (1,598)	62.9 (1,598)
Seat Travel	9.1 (230)	9.1 (230)
Recliner Range (degrees)	59.0	59.0

Interior Volume

Front – cu. ft. (cu. m)	62.2 (1.8)	62.2 (1.8)
-------------------------	------------	------------